



— NO BODY BETTER —

MM225 VELOCITY PACKAGE

MASTER MECHANIC™ SERIES CRANE BODY



*** Unit shown with optional equipment*

MM225 VELOCITY PACKAGE STANDARD FEATURES:

- 60" tall first & second compartments on CS or CS/RS
- Master Mechanic™ Series 5-drawer units in first & second RS compartments
- Bolt bin in RS horizontal compartment
- Welder's supply drawer and two fully adjustable shelves in CS first compartment
- O/A bracket in CS second compartment
- 20" workbench bumper w/ integrated receiver tube & D-ring safety hooks
- LED strip lighting in compartments



A product of the USA



BODY SPECIFICATIONS

- Reading Master Mechanic™ Series MM225 heavy-duty crane body package. Crane compartment with reinforcement rated for a 25,000 ft.lb. crane
- 84" cab-to-axle, 131" length, total width is 96", cargo width is 52".
- Compartment heights: 60" tall first & second road & curb side compartments (46" tall road side on RSL configuration), 46" heights on remaining road & curb side compartments
- 1/8" treadplate overlay on front of compartments and top of body
- Flush mount doors with internal hidden hinges
- Compression handles with 3-point roller-rod system and locking cylinders that are hidden by closed handle¹
- Redi-Safe non-skid application on cargo floor, top and backs of compartments, workbench bumper and front of body (lower portion only)
- Six integrated tie-downs in floor of cargo area
- LED strip lighting in compartments²
- 4 LED exterior work lights with 360 degree rotation on head and base
- Workbench storage bumper with 2" receiver hitch and D-ring safety hooks
- Outriggers - Manual in/out, manual up/down



* Unit shown with tray shelves (TRS R1, TRSR2) and other optional equipment.

KEY FEATURES



DRAWER UNITS

Heavy-duty drawers built on 500lb. slides with individually locking handles.



LED STRIP LIGHTING

LED lighting illuminates entire area of compartments giving user maximum visibility.²




OUTRIGGERS

Manual in/out, up/down outriggers.


BODY DATA / CLEAR DOOR OPENING DIMENSIONS

Model	Approx. Wt.	Cab-to-Axle	Approx. Clear Door Openings - H x W			
			(RS) 53-3/8" x 22-3/4"	(RS) 53-3/8" x 22-3/4"	(RS) 14-1/2" x 40-1/4"	(RS) 37-1/2" x 19-1/4"
MM225	3450 lbs.	84"	(CS) 53-3/8" x 26-1/4"	(CS) 53-3/8" x 19-1/4"	(CS) 14-1/2" x 40-1/4"	(CS) 37-1/2" x 19-1/4"
			(RSL) 37-1/2" x 22-3/4"	(RSL) 37-1/2" x 22-3/4"	(RSL) 14-1/2" x 40-1/4"	(RSL) 37-1/2" x 19-1/4"

Standard Configuration

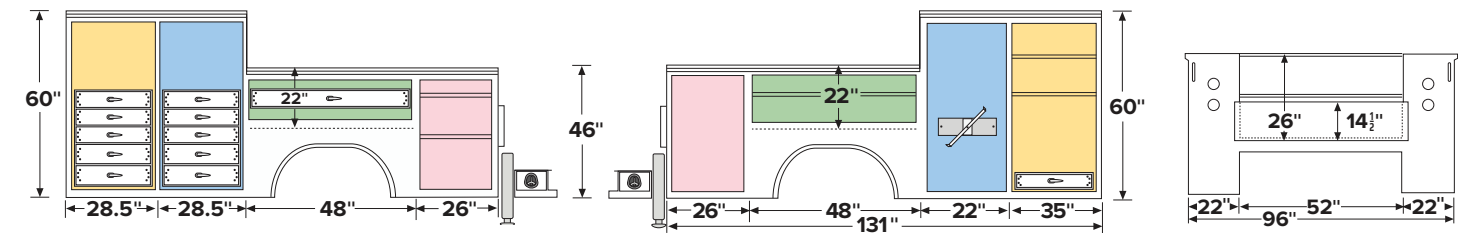

Roadside Low Configuration

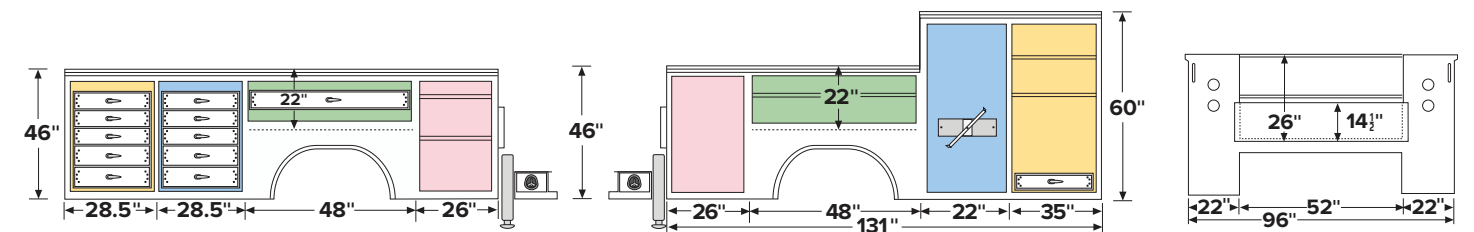

COMPARTMENT DRAWERS & SHELVING

- Curb-side Compartments:** Two fully adjustable shelves and welder's supply drawer in front compartment. O/A bracket in second compartment. One fully adjustable shelf in horizontal compartment. Rear compartment open for crane controls and reinforcement.
- Road-side Compartments:** One Master Mechanic™ Series 5-drawer unit in both first & second compartments. Bolt bin in horizontal compartment, including full width top shelf assembly. Two fully adjustable shelves in rear compartment.

UPGRADE OPTIONS

- Cranes:**
 - **PSC4016H:** 4,000 lb. (18,500 ft. lb.), 16 ft. reach, hydraulic boom extension crane
 - **PSC5025H:** 5,000 lb. (32,500 ft. lb.), 25 ft. reach, hydraulic boom extension crane
- Welders:** Miller Bobcat³
- Accessories:** Air hose reel with filter-regulator installed in road-side rear compartment³

RECOMMENDED COMPRESSOR PAIRINGS

MM225 VELOCITY PACKAGE COMPRESSOR PAIRINGS			
13hp Gas	MM40 - Reciprocating	MM45 - Rotary Screw	MM85 - Rotary Screw
●	●	○	○

● = Recommended ○ = Optional

¹ Storage bumper, when equipped, utilizes single-point locking.

² Lighting is deleted in compartment(s) with factory installed O/A brackets.

WARNING: Do not store flammable materials in compartment(s) that have lighting or switches installed, or are unvented.

³ Requires factory installation.



— NO BODY BETTER —

CORPORATE HEADQUARTERS:

825 E. Wyomissing Blvd.
Reading, PA 19611

READINGBODY.COM

Sold and Serviced Locally by



© 2019 Reading Truck Group. All rights reserved.

Version Number RTG19-MMSVP-225

All dimensions subject to plus or minus tolerance of 1/4" and all dimensions and specifications are subject to change without notice. Some items displayed in photographs are optional. Aluma-Fill, Aluma-Chock, Dual-Pro, Extend-A-Shelf, Grip-n-Glide, Latch-Matic, Marauder, Reading, Redi-Dek, Rhino Linings, Rugged American, S.M.A.R.T Racks, Spacemaker, Tool-Mates, and TUFF STUFF are registered trademarks of The Reading Group, LLC in the United States and some foreign countries.